Fire Alarm 2021

Tim Page, October 2021



New Fire Alarm Panel 2021

- New 4-zone Fire Panel
 - Power isolation switch
 - Call points with covers by every exit
 - Detectors and sounders in all rooms
 - Flashing beacons and cellar



• 2 new keys – Red for panel, white for call points







New Installations





Bar by doors



Glass washer area



Cellar + beacon



Cellar Fire Exit door




Rear Fire Door



Upper Ground Ch Rm

Home/Away ChRm + beacon

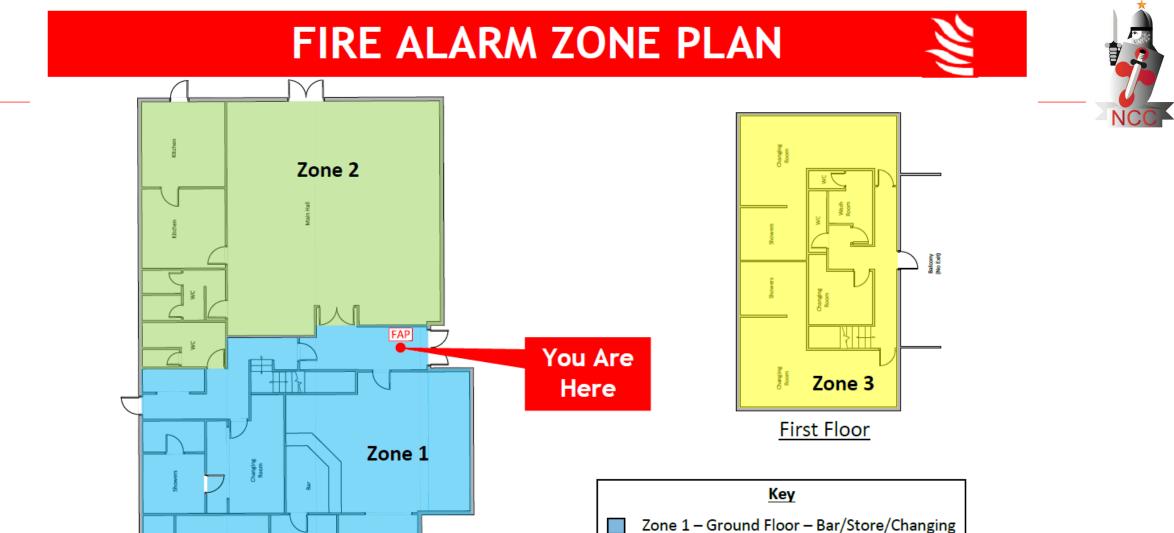

NORMANDY CRICKET CLUB HUNTS HILL ROAD, NORMANDY, GUILDFORD. GU3 2AH


Ground Floor

Jackson Fire & Security, Unit 128, 14 London Road, Guildford, Surry. GU1 2AG Tel: 01483 912345 E-Mail: guildford@jacksonfire.co.uk Web: www.jacksonfire.co.uk FOR FIRE & SECURITY SOLUTIONS

Zone 2 – Ground Floor – Hall/Kitchen


Zone 3 – First Floor Changing

Ground Floor Plan

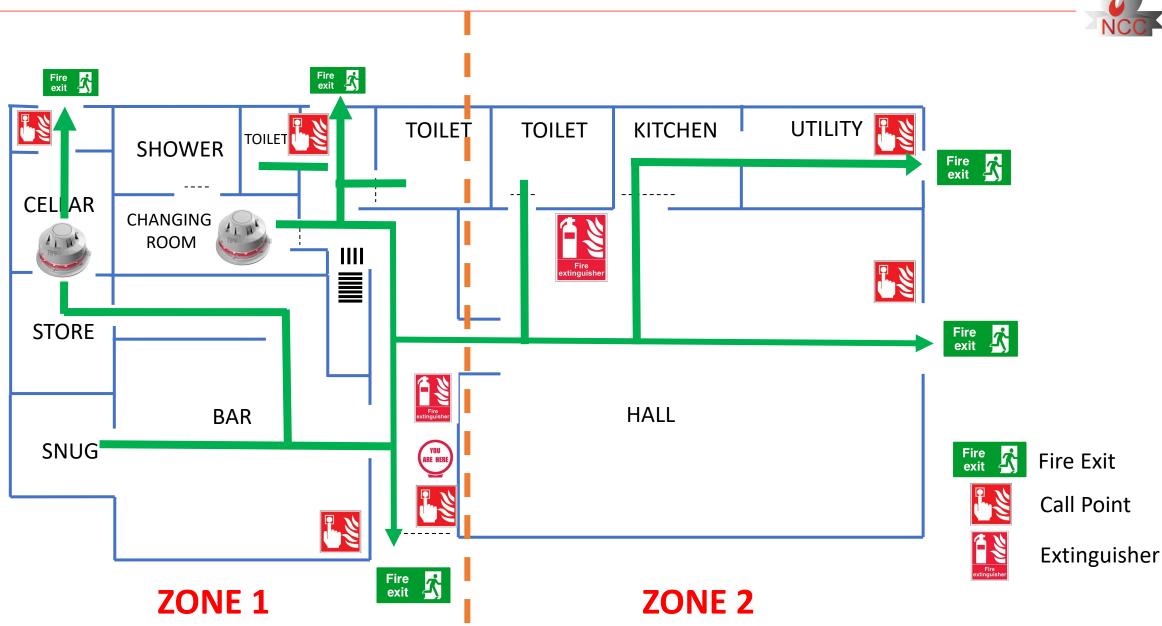


Ground Floor



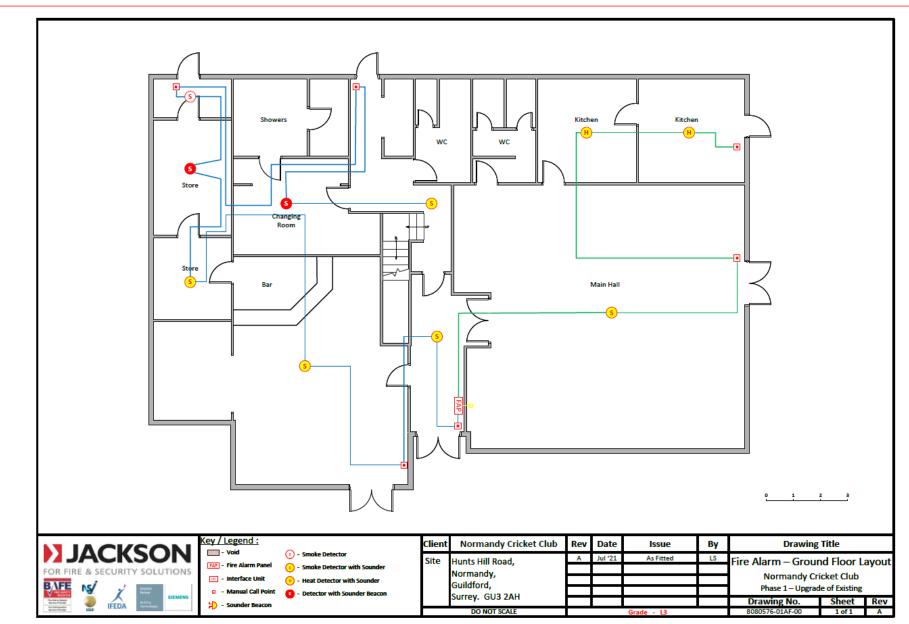




ZONE 3

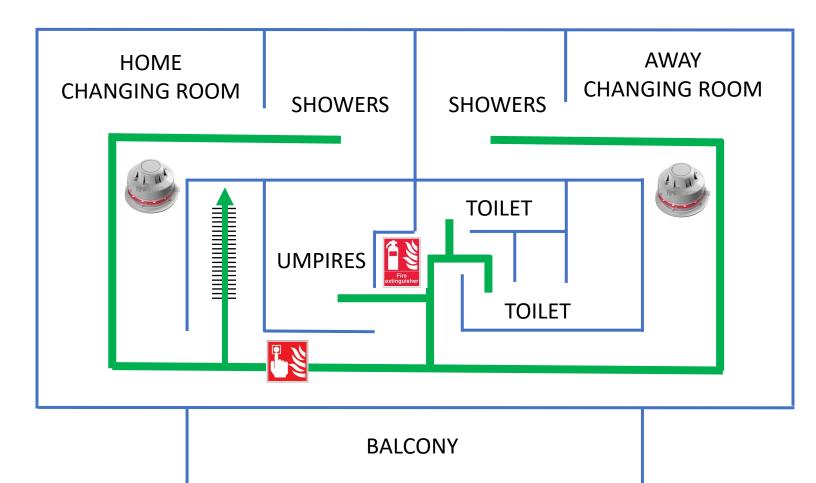

1st Floor



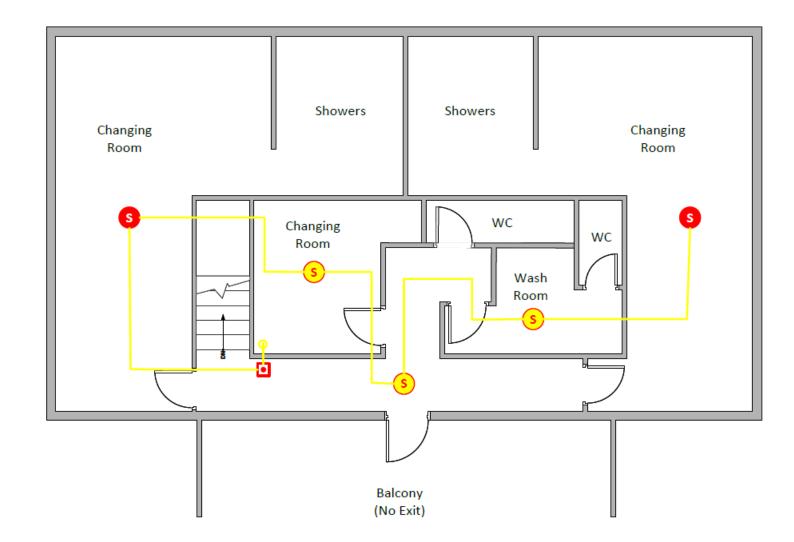

Fire Alarm Test

- 1. Insert Red key into panel and turn to I
- 2. Press Call Point, Zone will light up
- 3. Reset the Call point with the white key
- 4. Press Red button
- 5. Press Green button to Reset the panel
- 6. Turn the Red key to "0"







If the Fire Alarm Goes Off

- Evacuate the building, and check all rooms. Call 999 if there is a fire.
- Find the red/white keys which are hanging in the bar under the TV
- Look on the Fire Alarm Panel, see which Zone has been triggered:
 - 1 Bar, Cellar, Lobby, Upper Ground Changing Room, Rear
 - 2 Hall, Kitchen
 - 3 Upstairs
- Put Red key into the panel and turn to ON / 1
- Reset pushed call points using white key turn clockwise
- Press Red "silent sounders" button
- Press Green "control panel reset" button
- Turn Red key to 0 and remove
- Find triggered detector & report to NCC ASAP









